

GML60




Series	Size	Plate Length	Motor Flange	Accessories
GML	60	150	SV1	
	60 85	150 200	SV1: Servo Ø8 PCD45,M3 SV2: Servo Ø8 PCD46,M4 Suit for 100W AC Servo Motor	A: Pneumatic Connector None: Standard
			ST1: Stepper Ø5 PCD43.8,M3 ST2: Stepper Ø6 PCD43.8,M3 Suit for 42 Stepper Motor	
			S: Dedicated Stepper Motor	

Technical Parameters

Model/Spec		GML60-150	GML60-200
Allowable Torque	N.m	5.3	
Allowable Load	kg	5	
Rotation Angle	°	±95	
Rotation Accuracy		≤ 30"	
Repeatability		≤ 10"	
Max Rotary Radius	mm	150	200
Rotated Concentricity	mm	±0.01	
Flatness	mm	±0.01	
Gear Ratio	i	20	
Allowable Rotation Speed	° /sec	720	
Ingress Protection		IP60	
Motor		42 Stepper Motor/50W~100W Servo Motor	

XXY
GXYR
GX
GZ
GTZ
GXY
GR
GVH
GSH
GSR
GSHR
GSA
GSN
GSB
GSG
Parameter
GSZ
GMR
GMC
GMA
GML

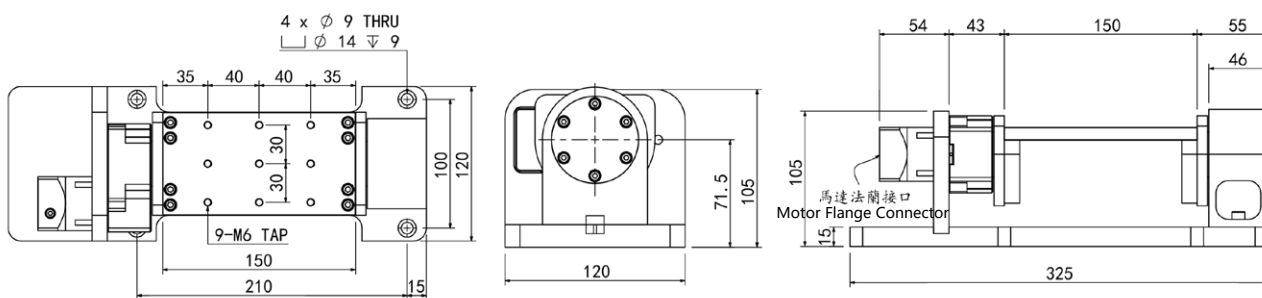

■ GML60-200-SV1

